


Aluminium Polyester Tapes

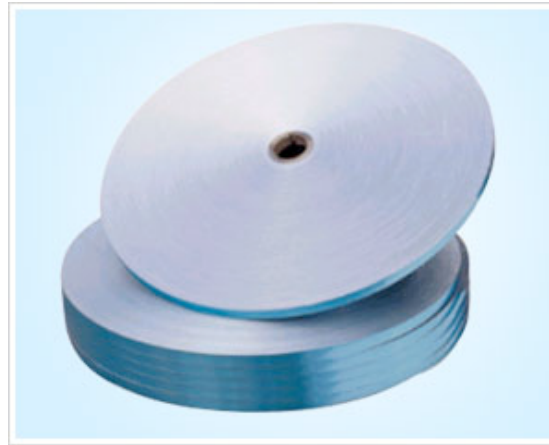

Specification

No.	Item		Unit	Value
1	Tensile Strength	MD	Mpa	≥ 150
		TD	Mpa	≥ 150
2	Elongation Strength	MD	%	≥ 80
		TD	%	≥ 80
3	Hot-Melt Shrinkage Rate	MD	%	≤ 2.0
	150c, 30 Min	TD	%	≤ 2.0
4	Volume Conductivity		$\Omega \cdot m$	$>10^{14}$
5	Frequency Electric Strength		V $\cdot\mu m$	>250
6	Dielectric Loss Tangent (50hz)			$<5 \times 10^3$
7	Constant Electricity(50hz)			3.0 ± 0.2
8	Inner Diameter (ID)		mm	76-150($\pm 5\%$)
9	Outer Diameter (OD)		mm	≤ 530
10	Width		mm	6-100
11	Length		m	100-5000
Remark: Detailed Specifications Based on GB 13950-92.				

Other parameters, such as width, length, ID and OD will meet the clients' requirements.