


Plastic Clad Steel Tape

Color: Green or Natural

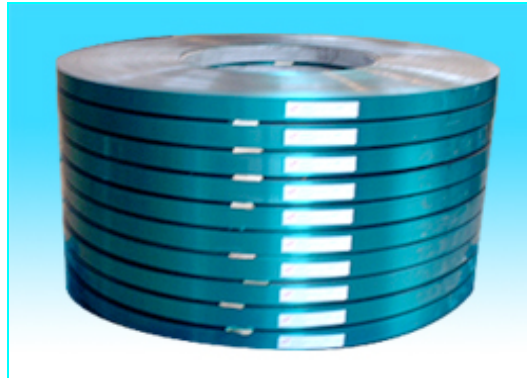

Specification

Item		Unit	Value
Appearance		---	Straight, Even, Free from burrs, inclusions, moisture, dust, pinholes, creases, cuts, tear or adhesion
Length		m	1000---5000
Width		mm	12---1100
Thickness	Steel	mm	0.155 or 0.200±0.010
	Side A of Coat	mm	0.058±0.013
	Side B of Coat	mm	0.058±0.013
	Total Thickness	mm	0.260 or 0.310±0.015
Chromium on Steel		g/m ²	0.08~0.34
Tensile Strength		MPA	310---390
Elongation at Break		%	20---25
Peel Strength between Steel and Plastic Coating	Side A	N/cm	≥6.13
	Side B	N/cm	≥6.13
Heat Seal Strength		N/cm	≥17.5
Heat Cut Strength		---	Breakage
Water Resistance (68±1 °C, 168h Peel Strength)	Side A	N/cm	≥6.13
	Side B	N/cm	≥6.13
Filling/Flooding Gel Resistance (68±1 °C, 168h)	SP	---	No Pickling or De-lamination
	WT-103	---	No Pickling or De-lamination
Dielectric Strength DC 2KV, 1min		---	No Breaking
Corrosion Resistance (0.1mol/L, HCl, 480h)		Grade	8

Other parameters, such as width, length, ID and OD will meet the clients' requirements.